


PROFESSIONAL PLUS

IF-1200

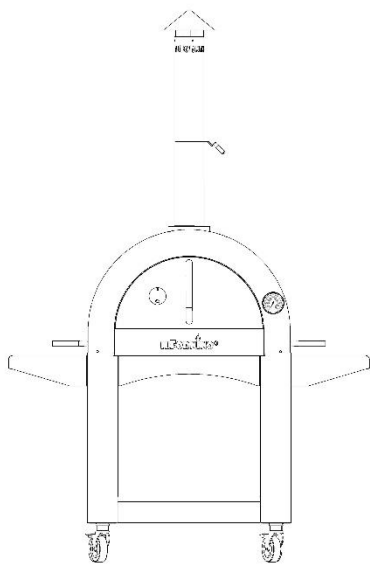

1007 in² COOKING AREA

OUTDOOR

RESIDENTIAL

LIGHT COMMERCIAL OVEN



UL - NSF / ANSI 4 (Sanitation)

SIGNATURE FEATURES

- ONE FLAT COOKING SURFACE - GRADE 304 STAINLESS STEEL 0.075" / 14 GAUGE 1.5" REFRACTORY STONE - DOOR MOUNTED THERMOMETER - FUEL TYPE-WOOD FIRED - HEATING TIME 30 MINUTES - ASH CLEAN OUT DRAWER IN THE BACK	1007 SQ. INCHES COOKING AREA 4" THICK CERAMIC FIBER BLANKET INSULATION 4 - 6 HOURS THERMAL MASS - PRE-ASSEMBLED CART / STAND 1 YEAR WARRANTY 2 SIDE TABLES / SHELVES 12"W X 43.75"L 5 - 10" PIZZA CAPACITY
---	--



PROFESSIONAL PLUS

IF-1200

OVEN COUNTER-TOP INSTALLATION

COUNTER SPACE WIDTH MIN.	30.5"
COUNTER SPACE DEPTH MIN.	46"
OVEN HEIGHT FROM COUNTER TO TOP OF CHIMNEY	51"
COUNTER SHOULD SUPPORT OVEN WEIGHT	200+ LBS.

***CERAMIC FIBER INSULATION BOARD ¼" - ½" CAN BE CUT TO FIT THE BASE OF THE OVEN TO PROTECT YOUR COUNTER-TOP.

CLEARANCES COMBUSTIBLE / NON-COMBUSTIBLE CONSTRUCTION

COMBUSTIBLES SIDE OF OVEN	2"
COMBUSTIBLES BACK OF OVEN	2"
COMBUSTIBLES FRONT OF OVEN	36"
COMBUSTIBLES CHIMNEY CAP TO ROOF****	24"-36"
NON-COMBUSTIBLES SIDES OF OVEN	0"
NON-COMBUSTIBLES BACK OF OVEN	0"
NON-COMBUSTIBLES FRONT OF OVEN OPENING	36"
NON-COMBUSTIBLES CHIMNEY CAP TO ROOF ****	16"-24"

****CHECK WITH YOUR LOCAL BUILDING DEPARTMENT

****MAKE SURE THERE IS ADEQUATE VENTILATION IN THAT AREA, OTHERWISE USE A DOUBLE WALLED CHIMNEY EXTENTION TO GO THROUGH THE ROOF OR RE-ROUTE THE CHIMNEY TO CLEAR COMBUSTIBLES AND AVOID CARBON MONOXIDE POISONING.


OPTIONAL ACCESSORIES

OVEN STAND	ITEM #IF-1200C
REPLACEMENT THERMOMETER	ITEM #IF-TMO
DOUBLE WALL CHIMNEY BASE 4"	ITEM #RB-SHT4CB
DOUBLE WALL CHIMNEY EXTENSION ADAPTER STRAIGHT PIPE 24"	ITEM #RB-SHT4SS24
DOUBLE WALLED CHIMNEY RAIN CAP WITH SPARK ARRESTOR	ITEM #RB-SHT4RC01
FIRE GUARD – LOG GUARD	ITEM #IFC330



PROFESSIONAL PLUS

IF-1200

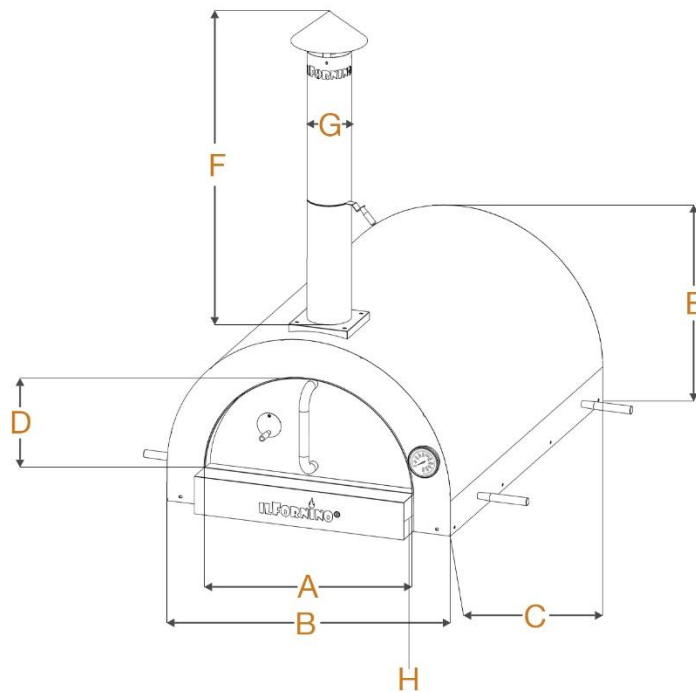


OVEN DIMENSIONS

A.	DOOR WIDTH	22.5"
B.	OVEN OUTSIDE WIDTH	30.5"
C.	OVEN OUTSIDE LENGTH	43.25"
D.	DOOR HEIGHT	11"
E.	OVEN OUTSIDE HEIGHT	19"
F.	CHIMNEY HEIGHT	24"
G.	CHIMNEY DIA.	4.5"
H.	OVERHANG LIP	4"
INSIDE DIMENSIONS W X L X H		26.5" X 38" X 13"



PROFESSIONAL PLUS

IF-1200

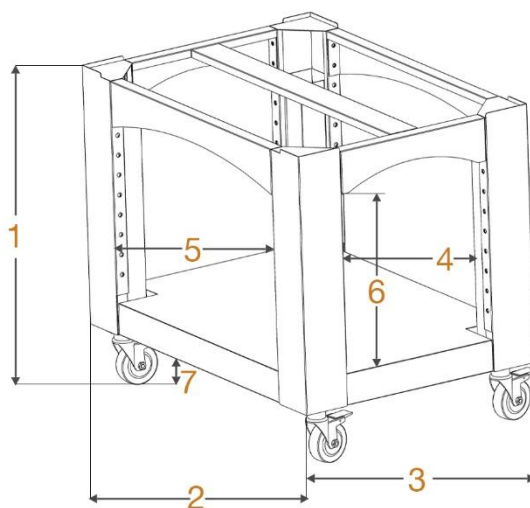

STAND DIMENSIONS

1.	STAND HEIGHT (ADJUSTABLE)	30" - 42"
2.	STAND WIDTH	30.75"
3.	STAND DEPTH	43.75"
4.	WIDTH BETWEEN LEGS (FRONT)	21.25"
5.	WIDTH BETWEEN LEGS (SIDE)	34.25"
6.	INSIDE HEIGHT (ADJUSTABLE)	17'-29.25"
7.	LEGS HEIGHT	5.5"

