


# ROMA MEDIA

## IF-800

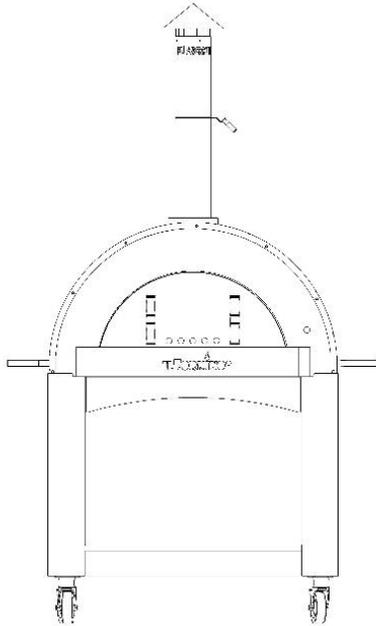

560 in<sup>2</sup> COOKING AREA

RESIDENTIAL

LIGHT COMMERCIAL OVEN

INDOOR / OUTDOOR



UL - NSF / ANSI 4 (Sanitation)

## SIGNATURE FEATURES

<ul style="list-style-type: none"> <li>▪ ONE FLAT COOKING SURFACE</li> </ul>	<ul style="list-style-type: none"> <li>▪ 560 SQ. INCHES COOKING AREA</li> </ul>
<ul style="list-style-type: none"> <li>▪ GRADE 304 STAINLESS STEEL 0.075" / 14 GAUGE AND 430 POWDER COATED TOP</li> </ul>	<ul style="list-style-type: none"> <li>▪ 6" THICK CERAMIC FIBER BLANKET INSULATION</li> </ul>
<ul style="list-style-type: none"> <li>▪ 1.5" REFRACTORY STONE</li> </ul>	<ul style="list-style-type: none"> <li>▪ 8 -10 HOURS THERMAL MASS</li> </ul>
<ul style="list-style-type: none"> <li>▪ WALL MOUNTED THERMOMETER</li> </ul>	<ul style="list-style-type: none"> <li>▪ PRE-ASSEMBLED CART / STAND</li> </ul>
<ul style="list-style-type: none"> <li>▪ FUEL TYPE-WOOD FIRED</li> </ul>	<ul style="list-style-type: none"> <li>▪ 1 YEAR WARRANTY</li> </ul>
<ul style="list-style-type: none"> <li>▪ PASSIVE DIRECTIONAL VENTING CHIMINEY WITH DAMPER</li> </ul>	<ul style="list-style-type: none"> <li>▪ 3 - 10" PIZZA CAPACITY</li> </ul>
<ul style="list-style-type: none"> <li>▪ GREAT FOR BAKING BREADS AND SLOW ROASTING MEATS</li> </ul>	



# ROMA MEDIA

## IF-800

### OVEN COUNTER-TOP INSTALLATION

COUNTER SPACE WIDTH MIN.	36.25"
COUNTER SPACE DEPTH MIN.	28"
OVEN HEIGHT FROM COUNTER TO TOP OF CHIMNEY	41.5"
COUNTER SHOULD SUPPORT OVEN WEIGHT	220+ LBS.

\*\*\*CERAMIC FIBER INSULATION BOARD ¼" - ½" CAN BE CUT TO FIT THE BASE OF THE OVEN TO PROTECT YOUR COUNTER-TOP.

### CLEARANCES COMBUSTIBLE / NON-COMBUSTIBLE CONSTRUCTION

COMBUSTIBLES SIDE OF OVEN	2"
COMBUSTIBLES BACK OF OVEN	2"
COMBUSTIBLES FRONT OF OVEN	36"
COMBUSTIBLES CHIMNEY CAP TO ROOF****	24"-36"
NON-COMBUSTIBLES SIDES OF OVEN	0"
NON-COMBUSTIBLES BACK OF OVEN	0"
NON-COMBUSTIBLES FRONT OF OVEN OPENING	36"
NON-COMBUSTIBLES CHIMNEY CAP TO ROOF ****	16"-24"

\*\*\*\*CHECK WITH YOUR LOCAL BUILDING DEPARTMENT

\*\*\*\*MAKE SURE THERE IS ADEQUATE VENTILATION IN THAT AREA, OTHERWISE USE A DOUBLE WALLED CHIMNEY EXTENTION TO GO THROUGH THE ROOF OR RE-ROUTE THE CHIMNEY TO CLEAR COMBUSTIBLES AND AVOID CARBON MONOXIDE POISONING.


### OPTIONAL ACCESSORIES

OVEN STAND	ITEM # IF-800C
REPLACEMENT THERMOMETER	ITEM #IF-TMO
DOUBLE WALL CHIMNEY STARTER PIPE 4"	ITEM #RB-SHT4SS8
DOUBLE WALL CHIMNEY EXTENSION ADAPTER STRAIGHT PIPE 24"	ITEM #RB-SHT4SS24
DOUBLE WALLED CHIMNEY RAIN CAP WITH SPARK ARRESTOR	ITEM #RB-SHT4RC01
FIRE GUARD – LOG GUARD	ITEM #IFC330



# ROMA MEDIA

## IF-800

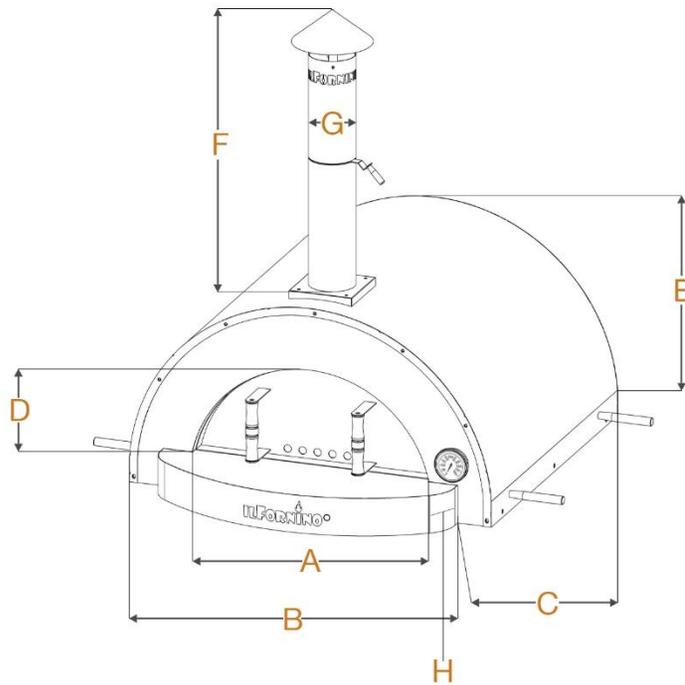


### OVEN DIMENSIONS

A.	DOOR WIDTH	23.75"
B.	OVEN OUTSIDE WIDTH	36"
C.	OVEN OUTSIDE LENGTH	25.5"
D.	DOOR HEIGHT	9.5"
E.	OVEN OUTSIDE HEIGHT	19.5"
F.	CHIMNEY HEIGHT	27"
G.	CHIMNEY DIA.	4.5"
H.	OVERHANG LIP	3.75"



# ROMA MEDIA

## IF-800

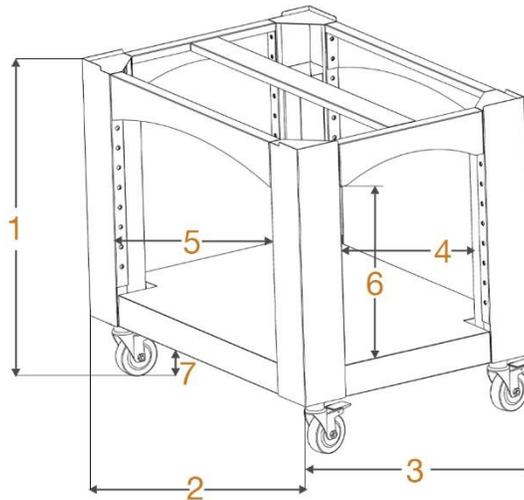

### STAND DIMENSIONS

1.	STAND HEIGHT (ADJUSTABLE)	30" - 42"
2.	STAND WIDTH	26"
3.	STAND DEPTH	36.75"
4.	WIDTH BETWEEN LEGS (FRONT)	27"
5.	WIDTH BETWEEN LEGS (SIDE)	16.5"
6.	HEIGHT BETWEEN STAND	25"
7.	LEGS HEIGHT	5.5"

