


MAESTRO – ROTATING 9 PIZZA OVEN

IL-6002-120

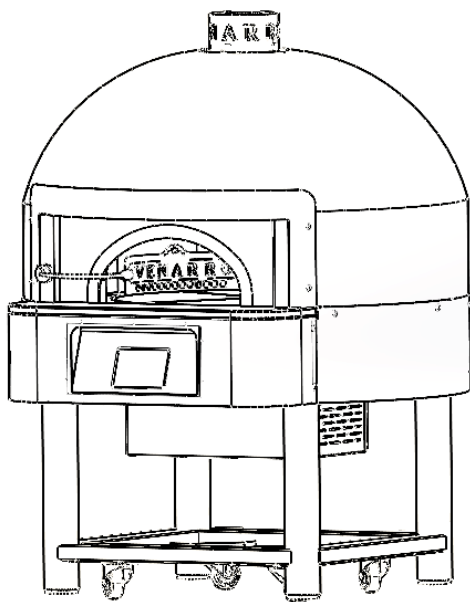

1752 in² COOKING AREA

INDOOR / OUTDOOR

TRADITIONAL POMPEII DOME
NEAPOLITAN OVEN



UL - NSF / ANSI 4 (Sanitation)

UL – ANSI Z21.17 / CSA 2.7 (Safety)

SIGNATURE FEATURES

- ONE FLAT COOKING SURFACE - HEATS UP IN A COUPLE HOURS AND RETAINS TEMP OVERNIGHT AROUND 300+DEGREES - COOK PIZZAS IN LESS THAN 90 SECONDS 7" COLOR TOUCH SCREEN CONTROL PANEL - ADJUSTABLE FLAME HEIGHT, ROTATIO SPEED, COOKING TEMPERATURE - POWER – 208V ~ 240V 20 AMP 130 PIES / HOUR	1752 SQ. INCHES COOKING AREA 9-10 – 12" PIZZA CAPACITY 1 FLAME GUARD BULIT IN - NATURAL GAS INLET 3/4" – LPG OPTIONAL 1 YEAR WARRANTY - TRADITIONAL POMPEII DOME NEAPOLITAN OVEN - DIGITAL IGNITION W/ THERMOSTAT
--	---



MAESTRO – ROTATING 9 PIZZA OVEN

IL-6002-120

CLEARANCES COMBUSTIBLE / NON-COMBUSTIBLE CONSTRUCTION

COMBUSTIBLES SIDE OF OVEN	2"
COMBUSTIBLES BACK OF OVEN	2"
COMBUSTIBLES FRONT OF OVEN	36"
COMBUSTIBLES CHIMNEY CAP TO ROOF****	24"-36"
NON-COMBUSTIBLES SIDES OF OVEN	0"
NON-COMBUSTIBLES BACK OF OVEN	0"
NON-COMBUSTIBLES FRONT OF OVEN OPENING	36"
NON-COMBUSTIBLES CHIMNEY CAP TO ROOF ****	16"-24"

****CHECK WITH YOUR LOCAL BUILDING DEPARTMENT

****MAKE SURE THERE IS ADEQUATE VENTILATION IN THAT AREA, OTHERWISE USE A DOUBLE WALLED CHIMNEY EXTENTION TO GO THROUGH THE ROOF OR RE-ROUTE THE CHIMNEY TO CLEAR COMBUSTIBLES AND AVOID CARBON MONOXIDE POISONING.

OPTIONAL ACCESSORIES

OVEN STAND	ITEM #IL-8000C
REPLACEMENT THERMOMETER	ITEM #IF-TMO
DOUBLE WALL CHIMNEY BASE 5"	ITEM #RB-SHT5CB
DOUBLE WALL CHIMNEY EXTENSION ADAPTER STRAIGHT PIPE 30"	ITEM #RB-SHT5SS30
DOUBLE WALLED CHIMNEY RAIN CAP WITH SPARK ARRESTOR	ITEM #RB-SHT5RC01
FIRE GUARD – LOG GUARD	ITEM #IFC330

OVEN DIMENSIONS

A. DOOR WIDTH	20"
B. OVEN OUTSIDE WIDTH	69"
C. OVEN OUTSIDE LENGTH	75"
D. DOOR HEIGHT	8.5"
E. OVEN OUTSIDE HEIGHT	18"
F. CHIMNEY HEIGHT	4"
G. CHIMNEY DIA.	8"
H. HEIGHT ASSEMBLED FLOOR TO TOP OF CHIMNEY	85"



MAESTRO – ROTATING 9 PIZZA OVEN

IL-6002-120

GAS OPTIONS – UL CERTIFIED – ANSI Z21.17/CSA 2.7

- Natural Gas (NG): 170,580 BTU

Gas Connection Pipe	¾"
Electronic Spark / Ignition	208V~240V 20 AMP Electrical Power Required
Flame / Air Mixture	Adjustable
Safety Thermocouple	Yes
Pilot Light	Yes
Digital Ignitor	Yes

