


ELITE – CHEF’S EDITION

IF-5000 WOOD / GAS

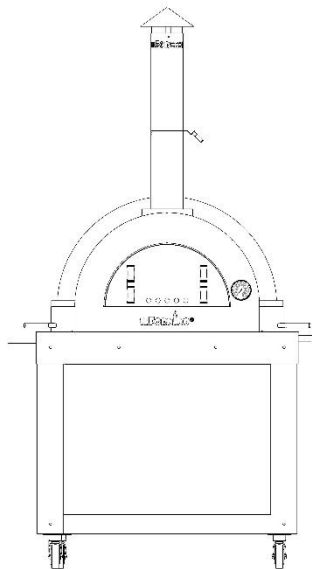

882 in² COOKING AREA

INDOOR / OUTDOOR

TRADITIONAL POMPEII DOME
NEAPOLITAN OVEN



UL - NSF / ANSI 4 (Sanitation)

UL – ANSI Z21.17 / CSA 2.7 (Safety)

SIGNATURE FEATURES

- ONE FLAT COOKING SURFACE - GRADE 304 STAINLESS STEEL 0.075" / 14 GAUGE AND 304 POWDER COATED DOME	1368 SQ. INCHES COOKING AREA 6" THICK CERAMIC FIBER BLANKET INSULATION
2" REFRACTORY STONE w/ PRE-CAST INSULATION - DOME MOUNTED THERMOMETER	8 -10 HOURS THERMAL MASS - EASY ASSEMBLY CART / STAND
- FUEL TYPE-WOOD FIRED/GAS (OPTIONAL) - PASSIVE DIRECTIONAL VENTIIN CHIMINEY WITH DAMPER	1 YEAR WARRANTY - TRADITIONAL POMPEII DOME NEAPOLITAN OVEN
DOUBLE WALL CHIMNEY UL 103 APPROVED (OPTIONAL)	LIFTING HANDLES INCLUDED



ELITE – CHEF’S EDITION

IF-5000 WOOD / GAS

OVEN COUNTER-TOP INSTALLATION

COUNTER SPACE WIDTH MIN.	42.5"
COUNTER SPACE DEPTH MIN.	40.5"
OVEN HEIGHT FROM COUNTER TO TOP OF CHIMNEY	54"
COUNTER SHOULD SUPPORT OVEN WEIGHT	400+ LBS.

***CERAMIC FIBER INSULATION BOARD ¼" - ½" CAN BE CUT TO FIT THE BASE OF THE OVEN TO PROTECT YOUR COUNTER-TOP.

CLEARANCES COMBUSTIBLE / NON-COMBUSTIBLE CONSTRUCTION

COMBUSTIBLES SIDE OF OVEN	2"
COMBUSTIBLES BACK OF OVEN	2"
COMBUSTIBLES FRONT OF OVEN	36"
COMBUSTIBLES CHIMNEY CAP TO ROOF****	24"-36"
NON-COMBUSTIBLES SIDES OF OVEN	0"
NON-COMBUSTIBLES BACK OF OVEN	0"
NON-COMBUSTIBLES FRONT OF OVEN OPENING	36"
NON-COMBUSTIBLES CHIMNEY CAP TO ROOF ****	16"-24"

****CHECK WITH YOUR LOCAL BUILDING DEPARTMENT

****MAKE SURE THERE IS ADEQUATE VENTILATION IN THAT AREA, OTHERWISE USE A DOUBLE WALLED CHIMNEY EXTENTION TO GO THROUGH THE ROOF OR RE-ROUTE THE CHIMNEY TO CLEAR COMBUSTIBLES AND AVOID CARBON MONOXIDE POISONING.


OPTIONAL ACCESSORIES

OVEN STAND	ITEM #IL-5000C
REPLACEMENT THERMOMETER	ITEM #IF-TMO
DOUBLE WALL CHIMNEY BASE 5"	ITEM #RB-SHT5CB
DOUBLE WALL CHIMNEY EXTENSION ADAPTER STRAIGHT PIPE 30"	ITEM #RB-SHT5SS30
DOUBLE WALLED CHIMNEY RAIN CAP WITH SPARK ARRESTOR	ITEM #RB-SHT5RC01
FIRE GUARD – LOG GUARD	ITEM #IFC330



ELITE – CHEF'S EDITION

IF-5000 WOOD / GAS

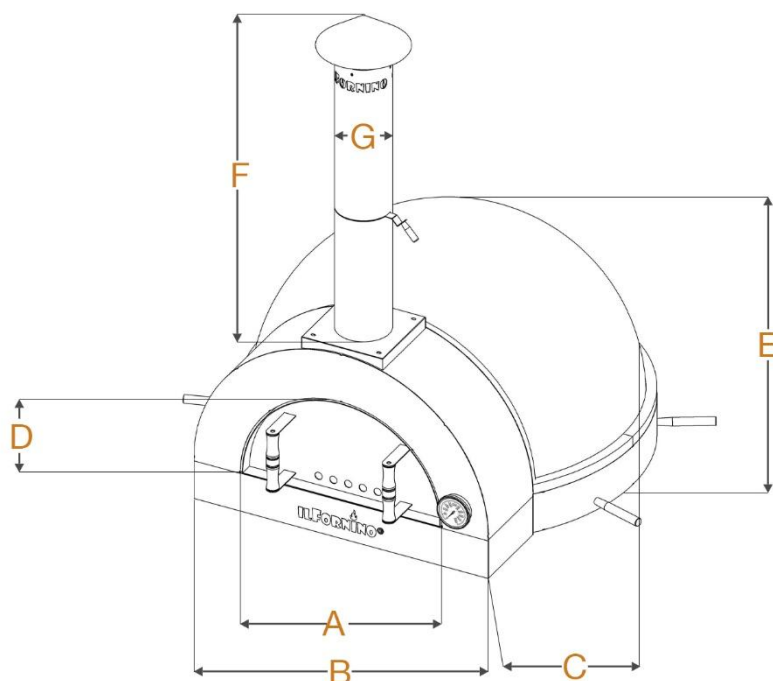


OVEN DIMENSIONS

A.	DOOR WIDTH	20.5"
B.	OVEN OUTSIDE WIDTH	30"
C.	OVEN OUTSIDE LENGTH	39.5"
D.	DOOR HEIGHT	10.25"
E.	OVEN OUTSIDE HEIGHT	21.5"
F.	CHIMNEY HEIGHT	34"
G.	CHIMNEY SIZE	5"
H.	INSIDE DIMENSIONS W X L X H 31.5" X 28" X 16"	



ELITE – CHEF’S EDITION

IF-5000 WOOD / GAS

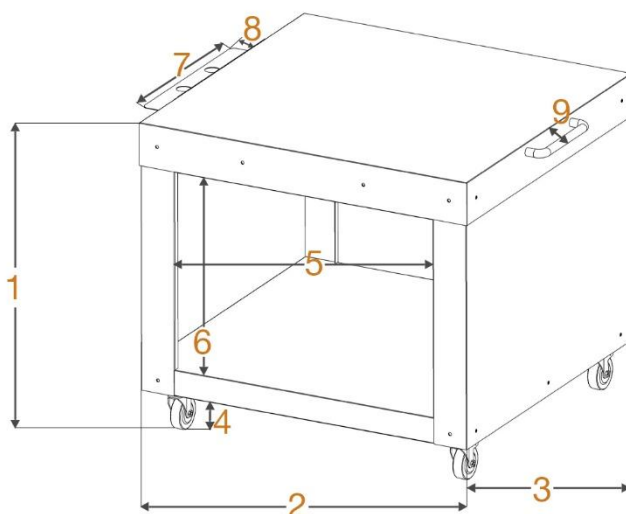

STAND DIMENSIONS

1.	STAND HEIGHT	38"
2.	STAND WIDTH	42.5"
3.	STAND DEPTH	40.5"
4.	LEGS HEIGHT	5.5"
5.	WIDTH BETWEEN LEGS (FRONT)	33.5"
6.	WIDTH BETWEEN LEGS (SIDE)	24.25"
7.	INSIDE HEIGHT	28"



ELITE – CHEF’S EDITION

IF-5000 WOOD / GAS

GAS OPTIONS – UL CERTIFIED – ANSI Z21.17/CSA 2.7

- Natural Gas (NG): 52,445 BTU
- Propane Gas (LPG): 54,626 BTU

Gas Connection Pipe	½”
Countertop Cut-out diameter	4 ½” Diameter
Manual Spark	No Electrical Power Required
Flame / Air Mixture	Adjustable
Safety Thermocouple	Yes
Pilot Light	Yes
Manual Ignitor	Yes

