


ELITE PLUS – CHEF’S EDITION

IF-8000- WOOD / GAS

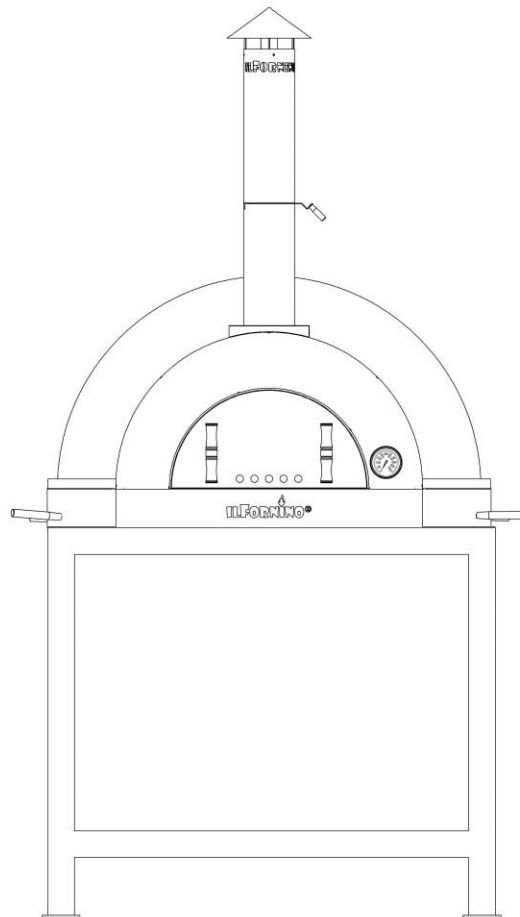

1368 in² COOKING AREA

INDOOR / OUTDOOR

TRADITIONAL POMPEII
DOME
NEAPOLITAN OVEN



UL - NSF / ANSI 4
(Sanitation)

UL - ANSI Z21.17/CSA
2.7 (Safety)

SIGNATURE FEATURES

- ONE FLAT COOKING SURFACE™
- GRADE 304 STAINLESS STEEL 0.075" / 14 GAUGE AND 304 POWDER COATED DOME
- 4" REFRACTORY STONE w/ PRE-CAST INSULATION
- HEATING TIME 45 MINUTES
- DOME MOUNTED THERMOMETER
- FUEL TYPE – WOOD FIRED / GAS (OPTIONAL)
- PASSIVE DIRECTIONAL VENTING CHIMNEY WITH DAMPER
- DOUBLE WALL CHIMNEY UL 103 APPROVED (OPTIONAL)
- 1368 SQ. INCHES COOKING AREA
- 6" THICK CERAMIC FIBER BLANKET INSULATION
- 8 – 10 HOURS THERMAL MASS
- 6 - 12" PIZZA CAPACITY
- EASY ASSEMBLY CART / STAND
- 1 YEAR WARRANTY
- TRADITIONAL POMPEII DOME NEAPOLITAN OVEN
- LIFTING HANDLES INCLUDED



WWW.ILFORNINO.COM



(877) 302-6660



711 EXECUTIVE BLVD. SUITE U VALLEY COTTAGE, NY 10989

ELITE PLUS – CHEF’S EDITION IF-8000 - WOOD / GAS



OVEN COUNTER-TOP INSTALLATION

COUNTER SPACE WIDTH MIN.	45.5"
COUNTER SPACE DEPTH MIN.	48.25"
OVEN HEIGHT FROM COUNTER TO TOP OF CHIMNEY	52.5"
COUNTER SHOULD SUPPORT OVEN WEIGHT	395+ LBS.

*** CERAMIC FIBER INSULATION BOARD ¼" – ½" CAN BE CUT TO FIT THE BASE OF THE OVEN TO PROTECT YOUR COUNTER-TOP.

CLEARANCES COMBUSTIBLE / NON-COMBUSTIBLE CONSTRUCTION

CONBUSTIBLES SIDES OF OVEN	2"
CONBUSTIBLES BACK OF OVEN	2"
CONBUSTIBLES FRONT OF OVEN OPENING	36"
CONBUSTIBLES CHIMNEY CAP TO ROOF *****	24"- 36"
NON-CONBUSTIBLES SIDES OF OVEN	0"
NON-CONBUSTIBLES BACK OF OVEN	0"
NON-CONBUSTIBLES FRONT OF OVEN OPENING	36"
NON-CONBUSTIBLES CHIMNEY CAP TO ROOF *****	16"- 24"

***** CHECK WITH YOUR LOCAL BUILDING DEPARTMENT

***** MAKE SURE THERE IS ADEQUATE VENTILATION IN THAT AREA, OTHERWISE USE A DOUBLE WALLED CHIMNEY EXTENSION TO GO THROUGH THE ROOF OR RE-ROUTE THE CHIMNEY TO CLEAR COMBUSTIBLES AND AVOID CARBON MONOXIDE POISONING.

OPTIONAL ACCESSORIES

OVEN STAND	ITEM #IL-8000C
REPLACEMENT THERMOMETER	ITEM # IF-TMO
DOUBLE WALL CHIMNEY BASE 5"	ITEM # RB-SHT5CB
DOUBLE WALL CHIMNEY EXTENSION ADAPTER STRAIGHT PIPE 30"	ITEM # RB-SHT5SS30
DOUBLE WALLED CHIMNEY RAIN CAP WITH SPARK ARRESTOR	ITEM # RB-SHT5RC01
FIRE GUARD – LOG GUARD	ITEM # IFC330



WWW.ILFORNINO.COM




(877) 302-6660



711 EXECUTIVE BLVD. SUITE U VALLEY COTTAGE, NY 10989

ELITE PLUS – CHEF'S EDITION

IF-8000 - WOOD / GAS

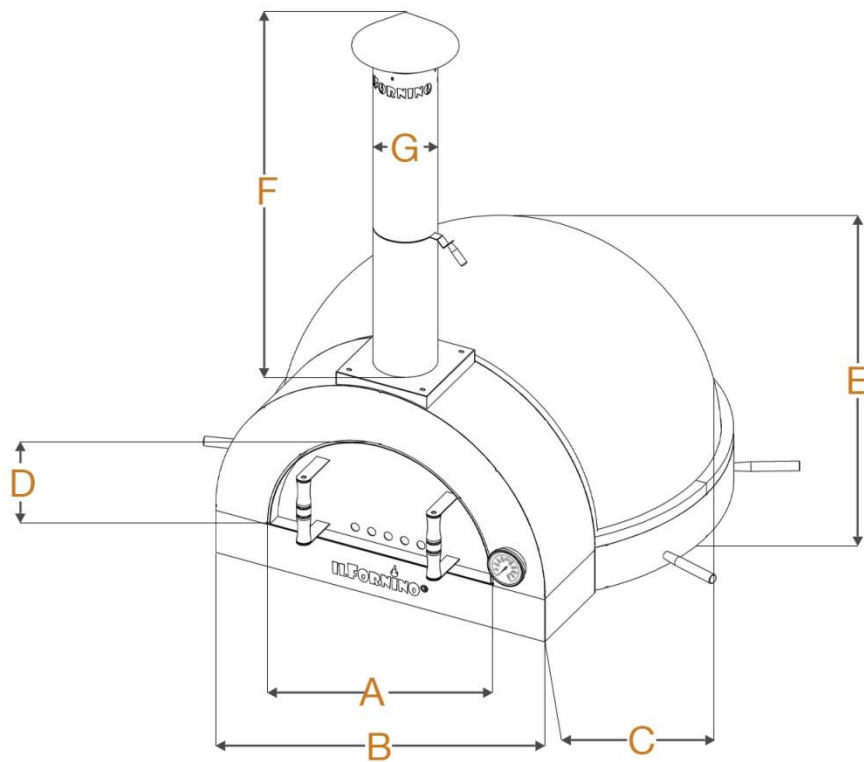

OVEN DIMENSIONS

A. DOOR WIDTH	20.5"
B. OVEN OUTSIDE WIDTH	45.5"
C. OVEN OUTSIDE LENGTH	48.25"
D. DOOR HEIGHT	10"
E. OVEN OUTSIDE HEIGHT	26"
F. CHIMNEY HEIGHT	32"
G. CHIMNEY SIZE: INSIDE DIA. / OUTSIDE DIA.	5" / 5.25"

INSIDE DIMENSIONS: W X L X H

39" X 36.5" X 19.5"



WWW.ILFORNINO.COM




(877) 302-6660



711 EXECUTIVE BLVD. SUITE U VALLEY COTTAGE, NY 10989

ELITE PLUS – CHEF’S EDITION

IF-8000 - WOOD / GAS

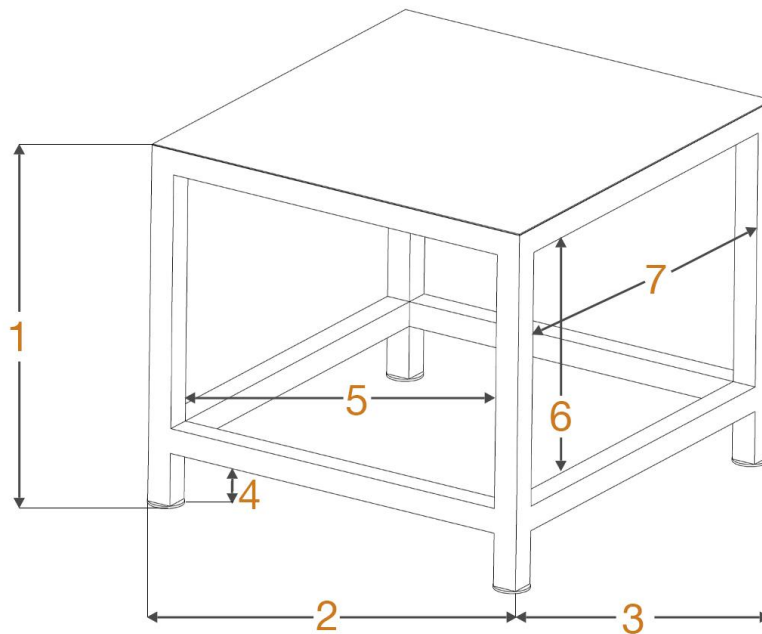

STAND DIMENSIONS

1.	STAND HEIGHT	40"
2.	STAND WIDTH	48"
3.	STAND DEPTH	46"
4.	LEGS HEIGHT	6.25"
5.	WIDTH BETWEEN LEGS (FRONT)	42.375"
6.	WIDTH BETWEEN LEGS (SIDE)	40.375"
7.	INSIDE HEIGHT	28"



WWW.ILFORNINO.COM



(877) 302-6660



711 EXECUTIVE BLVD. SUITE U VALLEY COTTAGE, NY 10989

ELITE PLUS – CHEF’S EDITION
IF-8000 - WOOD / GAS



Gas Options - UL Certified - ANSI Z21.17/CSA 2.7

- Natural Gas (NG): 52,445 BTU
- Propane Gas (LPG): 54,626 BTU

Gas Connection Pipe	½"
Countertop Cut-out diameter	4 ½" Diameter
Manual Spark	No Electrical Power Required
Flame / Air Mixture	Adjustable
Safety Thermocouple	Yes
Pilot Light	Yes
Manual Ignitor	Yes

